

Filter Dust Monitor

 \mathbf{V}

 \triangleright

Ş

ELECTRODYNAMIC

PROCESS & EMISSIONS MONITORING SYSTEMS

ale ale ale

DUST ALARM 40

The new PCME DUST ALARM 40 is a compact Continuous Filter Dust Monitor comprising a sensor and control unit, ideally suited for filter monitoring to ensure correct, expected filter performance. The clear, simple, icon-driven menu provides users with a language-free setup and system overview. Utilising ENVEA's patented ElectroDynamic® technology ensures accurate, reliable monitoring.

Key Features:

- Icon menu

Z

- Full-colour, anti-glare 2.8" LCD (4:3 ratio)
- Full, clear System Overview
- Relative dust reading on clear scale 0-100%
- 2x Independent alarm set points, clearly defined
- System status/Alarms clearly defined
- External keypad for User Settings

ADDED VALUE FEATURES AND BENEFITS


Feature	Benefit
Icon Menu 0	Simple, easy setup and review of data, not language dependent
Alarm Delay Feature 🛈	Ensures that there are no false alarms from bag- cleaning sequences.
Two Independent Alarms 2	Each of the two alarms can be set independently by the user, directly on the scale
Dust 'Overrange' Icon 🕄	Instant notification of 'overrange' to define broken and leaking bag failures
Security Setting ④	Settings can be locked to prevent tampering by unauthorised personnel
DSP Signal Processing	High accuracy signal providing reliable results
Field Upgradeable	Enhanced features can be added at any time without the need to return the instrument to factory



Settings Screen



Normal System Operation



60 80 100 Overrange Alarm

20

40

Set Password

www.envea.global



PRODUCT SPECIFICATIONS

PCME DUST ALARM 40

SYSTEM OPTIONS AND SPECIFICATIONS

DUST ALARM 40				
Stack diameter	Up to 4 m (13 ft.)			
Flue Gas Velocity	>4 m/s			
Dust Level Response	<1 to 500 mg/m³ (application dependent)			
Sensor Specification				
Ambient Temperature	-20°C to +50°C (-4°F to 122°F)			
Protection Rating	IP65			
Weight	900 g (2 lb), excl. rod			
Power Supply Voltage	24V DC (from the control unit)			
Control Unit Specification				
Туре	DUST ALARM 40 Controller			
No. of Sensors/ Channels	1			
Display	Full-colour, anti-glare 2.8″ LCD (4:3 ratio)			
Weight	1.2 kg (2.7 lb)			
Outputs (standard)	2x Alarm Relays (0.5A DC @24V)			
Outputs (optional)	1x 4-20 mA output (250 Ω , isolated)			
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)			
Enclosure Protection Rating	IP66			
Power Supply Voltage	80-230 V AC (50/60 Hz)			
Cable entries	3x M16 cable glands 1x M20 cable gland (for mains power cable)			

System Options			Order Code
Flue Gas Temperature	-20 to +125°C (-4°F to +257°F) -20 to +250°C (-4°F to +482°F)	standard option	125C 250C
Rod Length*	100, 300 , 600, or 1000 mm (4, 12, 24 or 40 in., nom.)	specify	RODxxxx
Rod Material	Stainless Steel	standard	S
Sensor Connection	1/2" British Standard Pipe (BSP)	standard	BSPP
Air Purge	None	standard	0
	½″ Air purge unit, BSP	option	AP-BS
	Air Filter + Regulator assembly for purge fitting	option	FFR
Outputs	No 4-20 mA output 4-20 mA output	standard option	0 420
Hazardous Zones**	Not required	standard	0
	ATEX Zone 2 (Gas) and 22 (Dust)	option	Х

	AIEX
GAS/DUST ZONE	ZONE 2/22
Certificate number:	PCME17ATEX0002X
	Outside stack (enclosure):
Certification code:	Ex nA IIB T6 Gc Ex tc IIIC T80°C Dc Ta = -20°C to +50°C
	Inside stack (probe [^]):
	Ex nA IIB T2 Gc Ex tc IIIC T240°C Dc
	Ta = -20°C to +240°C II 3G/D


A The probe does not generate heat, therefore, the surface temperature is dependent upon the stack temperature, maximal 240 °C (465 °F)

5mm

92mm

*For other rod lengths please contact ENVEA UK or your local ENVEA representative. **The max. flue gas temperature for Ex sensors is 240°C (464°F).

Note: For more information related to the product, options and order codes, refer to the PCME DUST ALARM 40 Order Codes Guide (available on request from ENVEA or your local ENVEA representative).

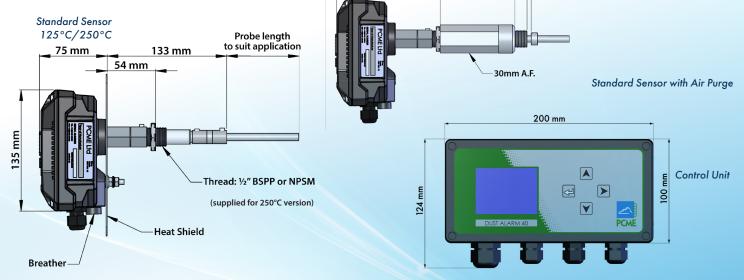

128mm

ABOUT ENVEA

As a progressive environmental Company, ENVEA specialises in particulate measurement for industrial processes. With a worldwide reputation for reliability, innovation and technological excellence, the Company produces under the trademark envea[™] equipment for concentration and mass monitoring for regulatory, environmental and process control requirements. A dedicated team of qualified application and sales engineers is always on hand and should be consulted in the selection and usage of the most suitable equipment for any particulate application.



ENVEA UK ENVEA House Rose and Crown Road Swavesey / Cambridge - UK CB24 4RB T +44 (0)1480 468200 C contact.gb@envea.global





www.envea.global